




NOTES:

- CONNECTOR - #86-20002 - P108E-14-18S(476) - MOTOR END
- CABLE - 2 SEPARATE CABLES: CBL 145 OD = 10.9MM (.43") & CBL 142 OD = 9.9MM (.39")
- PROTECTIVE CAP - EP-18 CAPPLUGS
- BEND RADIUS: CBL 145 = 65.5MM (2.58")
CBL 142 = 59.4MM (2.34")
- UNUSED WIRES NEED TO BE CUT BACK AND CONCEALED.

xx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

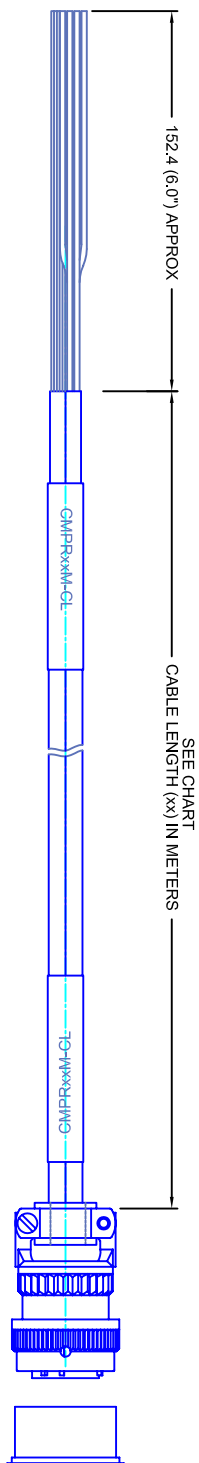

REAR FACE OF SOCKET INSERT

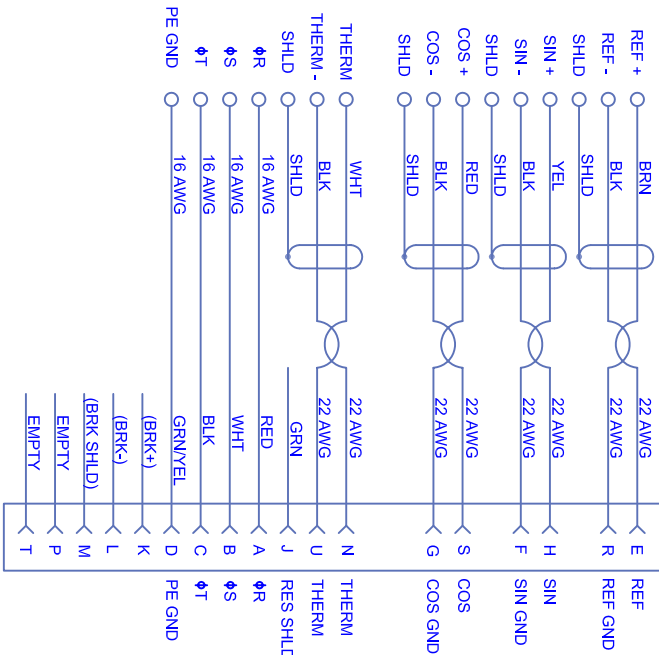

PWR/RES CABLE
14-18S/FLYING LEADS

TOLERANCES UNLESS SPECIFIED	
BORER:	= H12 ✓
DECIMAL .xxx	± .12 (0.005)
DECIMAL .xx	± .25 (0.010)
DECIMAL .x	± .51 (0.020)
ANGLE	± .01 (0.06)
ANGLE (MM (INCHES))	± 0.50
REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN (0.10°)	
PROPRIETARY RIGHTS OF CUSTOM MOTORS ARE INCLUDED IN THE INFORMATION CONTAINED HEREIN. THIS DRAWING AND/OR DOCUMENT SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF CUSTOM MOTORS INC.	
CUSTOMER:	DRAWN: DFLA SHEET: 1 OF 1
SCALE:	DATE:
NA	1/20/05
DRAWING NO. CMPRxxM-CL	
REV.	1

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	PRELIMINARY DRAWING	1/20/05	