



NOTES:

1. CONNECTOR - SG3106F-32-17S(476)
2. CABLE - 8 AWG (4) CONDUCTORS: Ø18.3MM (.72")
3. PROTECTIVE CAP - EP-32 CAPPLUGS
4. BEND RADIUS = 110MM (4.33')

xxx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

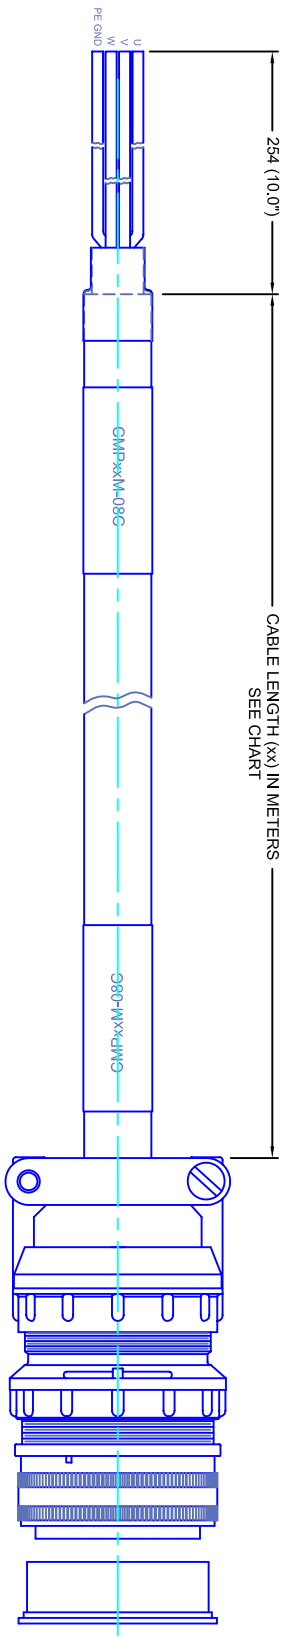

CABLE LENGTH (xx) IN METERS
SEE CHART



REAR FACE OF SOCKET INSERT

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	RELEASE DRAWING	3/25/04	
2	SWITCH PIN A & PIN B	6/3/04	

TOLERANCES UNLESS SPECIFIED

SURFACE FINISH: = 63 Ra ✓

BORER: = H12

DECIMAL .xxx ±.12 (.005)

DECIMAL .xx ±.25 (.010)

DECIMAL .x ±.51 (.020)

FRACTION ±.40 (.016)

ANGLE (MM/INCHES) ±.030

REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN (0.10')

PROPRIETARY RIGHTS OF CUSTOM MOTORS ARE INCLUDED IN THE INFORMATION DISCLOSED HEREIN. THIS INFORMATION DOES NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

CUSTOMER: 190MM/8 AWG/32-17S

SCALE: 1:1

DATE: 3/25/04

DRAWING NO.: CMPxxM-08C

DRAWN: DFLA

SHEET: 1 OF 1

REV.: 2

CUSTOM MOTORS INC

POWER CABLE