
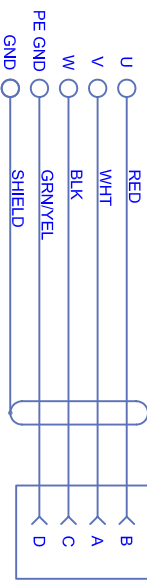



NOTES:

1. CONNECTOR - SG3106F-22-22S(476)
2. CABLE - 8 AWG (4) CONDUCTORS: Ø18.3MM (.72")
3. PROTECTIVE CAP - EP-20 CAPPLUGS
4. BEND RADIUS = 110MM (4.33')

xxx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

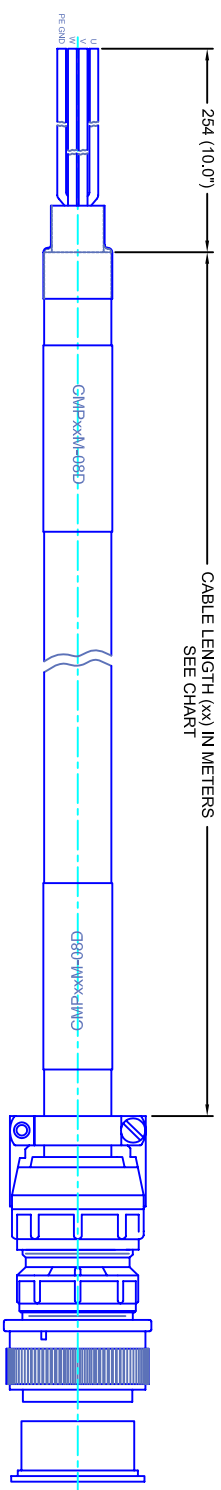

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	RELEASE DRAWING	7/15/04	



REAR FACE OF SOCKET INSERT

TOLERANCES UNLESS SPECIFIED

SURFACE FINISH: = 63 Ra ✓

BOR: = H12

DECIMAL .xxx ±.12 (.005)

DECIMAL .xx ±.25 (.010)

DECIMAL .x ±.51 (.020)

FRACTION ±.40 (.016)

ANGLE (MM (INCHES)) ±.030

REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN

CUSTOMER: DRAWN: DFLA SHEET: 1 OF 1

SCALE: 1:1 DATE: 6/16/04 DRAWING NO.: CMP-xxM-08D REV.: 1

POWER CABLE

142MM/8 AWG/22-22S

CUSTOM MOTORS INC

PROPRIETARY RIGHTS OF CUSTOM MOTORS ARE INCLUDED IN THE INFORMATION DISCLOSED HEREIN. THIS INFORMATION IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.