

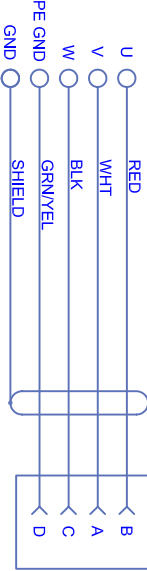


**NOTES:**

1. CONNECTOR - SG3106F-32-17S(476)
2. CABLE - 12 AWG (4) CONDUCTORS; CABLE OD = Ø11.7MM (.46")
3. PROTECTIVE CAP - EP-32 CAPPLUGS
4. BEND RADIUS = 70.3MM (2.77")

xxx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

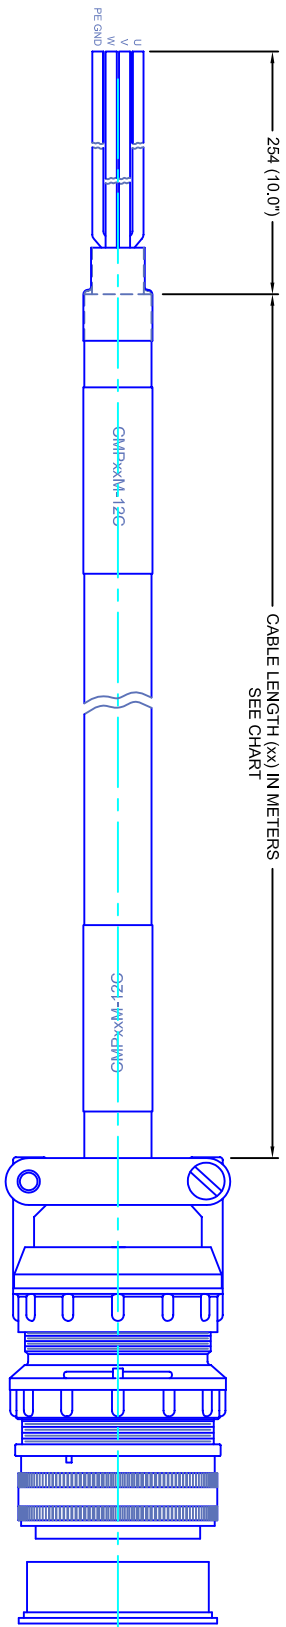

REAR FACE OF SOCKET INSERT

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	RELEASE DRAWING	6/5/04	

<p>TOLERANCES UNLESS SPECIFIED</p> <p>SURFACE FINISH: = 63 Ra ✓</p> <p>BORER: = H12</p> <p>DECIMAL .xxx ±.12 (.005)</p> <p>DECIMAL .xxx ±.25 (.010)</p> <p>DECIMAL .x ±.51 (.020)</p> <p>ANGLE ° ±.03</p> <p>ANGLE ° (INCHES) ±.030</p>		
<p>REMOVE ALL BURRS, BREAK SHARP EDGES, AND FILE SMOOTH</p>		

190MM/12 AWG/32-17S

POWER CABLE

PROPRIETARY RIGHTS OF CUSTOM MOTORS ARE INCLUDED IN THE INFORMATION DISCLOSED HEREIN. THIS DOCUMENT AND/OR CONTENTS THEREOF ARE NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

MATERIAL:	SCALE: 1:1	DATE: 6/5/04	DRAWING NO.: CMPxxM-12C	REV.: 1
FINISH:	CUSTOMER:	DRAWN: DFLA	SHEET: 1 OF 1	