

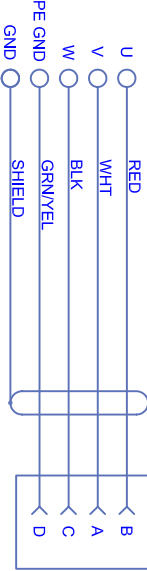


NOTES:

1. CONNECTOR - SG3106F-32-17S(476)
2. CABLE - 14 AWG (4) CONDUCTORS; CABLE OD = Ø10.7 (.42")
3. PROTECTIVE CAP - EP-32 CAPPLUGS
4. BEND RADIUS = 63.7 (2.51")

xxx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

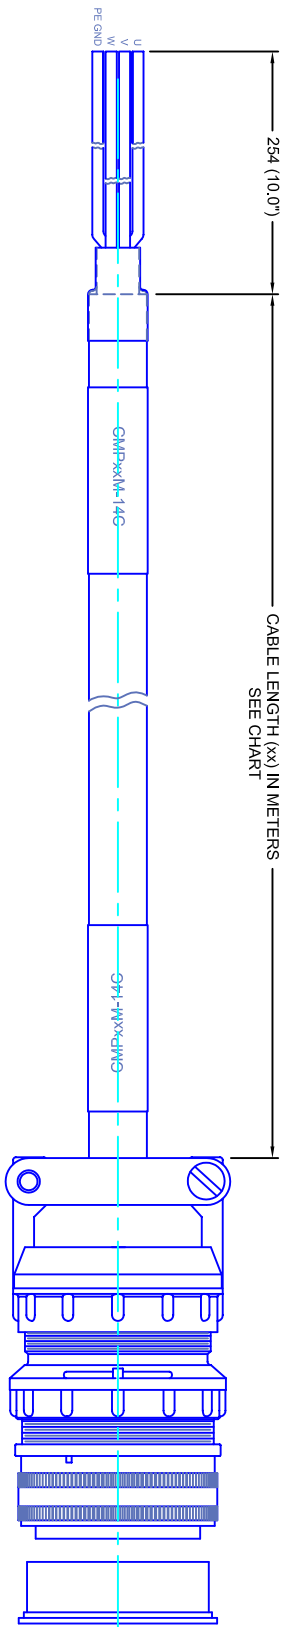

REAR FACE OF SOCKET INSERT

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	RELEASE DRAWING	7/15/04	

TOLERANCES UNLESS SPECIFIED

BORING: = H12 ✓
 SURFACE FINISH: = 63 Ra ✓
 DECIMAL .xxx ±.12 (.005)
 DECIMAL .xx ±.25 (.010)
 DECIMAL .x ±.51 (.020)
 FRACTION ±.40 (.016)
 ANGLE (MM (INCHES)) ±.030

REMOVE ALL BURRS, BREAK SHARP EDGES, AND FILE SMOOTH AND STAMPER

PROPERTY RIGHTS OF CUSTOM MOTORS ARE INCLUDED IN THE INFORMATION DISCLOSED HEREIN. THIS INFORMATION DOES NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

CUSTOMER: CUSTOM MOTORS INC
 DRAWING NO. 190MM14 AWG/32-17S
 DRAWN: DFLA SHEET: 1 OF 1

SCALE: 1:1 DATE: 6/5/04
 MATERIAL: CWPxxM-14C

REV. 1