

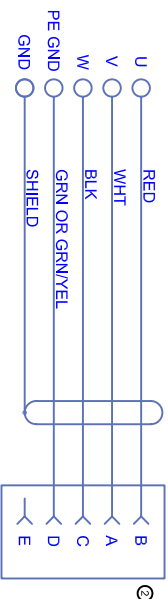


**NOTES:**

- CONNECTOR - PT06E-14-SS(476) - MOTOR END
- CABLE - 14 AWG - 4 CONDUCTORS, SHIELD; CABLE OD = Ø10.7MM (.42")
- PROTECTIVE CAP - CAPPLUG #?
- BEND RADIUS = 63.7 (2.51")

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	RELEASE DRAWING	6/14/04	
2	CHG B AND A, CA DRIVE CONFIG	10/9/05	

xx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

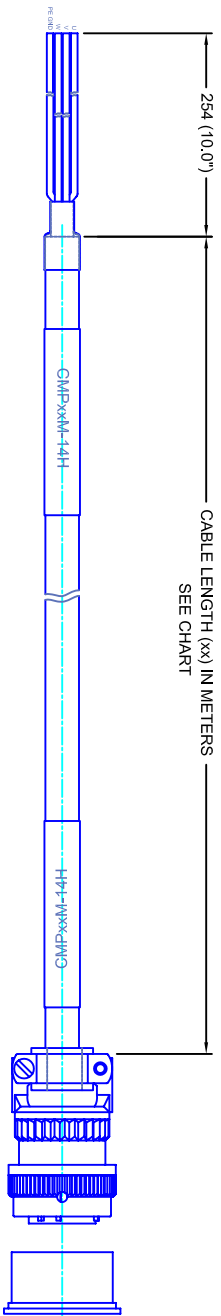

REAR FACE OF SOCKET INSERT

CABLE LENGTH (xx) IN METERS  
SEE CHART

**TOLERANCES UNLESS SPECIFIED**  
 SURFACE FINISH: = 63 Ra ✓  
 BORE: = H12  
 DECIMAL: .xxx ±.12 (.005)  
 DECIMAL .xxx ±.25 (.010)  
 DECIMAL .x ±.51 (.020)  
 DECIMAL .x ±.40 (.016)  
 ANGLE: = 0.50  
 DIM (INCHES)

REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN (0.10")  
 PROHIBIT ANY RIGHTS OF CUSTOM MOTORS ARE INCLUDED IN THE INFORMATION DISCLOSED HEREIN. THIS INFORMATION IS FOR YOUR INFORMATION ONLY. CUSTOMER'S SPECIFICATIONS SHALL TAKE PRECEDENCE OVER THIS DRAWING.  
 CUSTOMER: DRAWN: DFLA SHEET: 1 OF 1

SCALE: 1:1 DATE: 5/14/04 DRAWING NO.: CMPxxM-14H REV.: 2



**POWER CABLE**  
 89/114 - 14 AWG - 14-SS