



**NOTES:**


- CONNECTOR - #86-20002 - P108E-14-18S(476) - MOTOR END
- CABLE - 22 AWG - 6 PR INDIVIDUAL SHIELDS ; CABLE DIAMETER = 9.19MM (.362")
- AMP END - FLYING LEADS
- UNUSED WIRES NEED TO BE CUT BACK AND CONCEALED AT DATUM -A-

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	PRELIMINARY DRAWING	11/11/04	

xx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

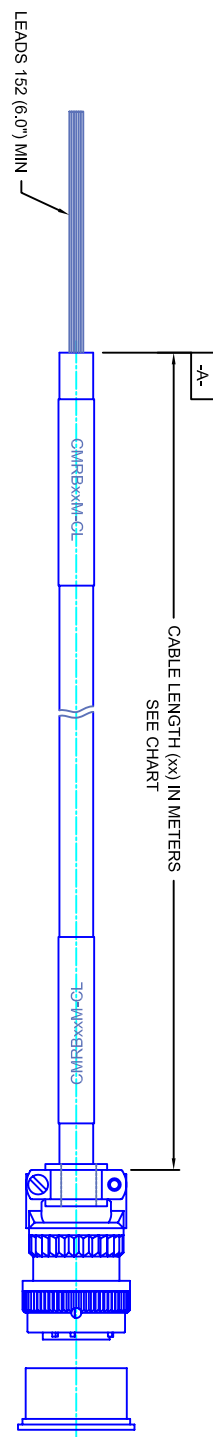

REAR FACE OF SOCKET INSERT

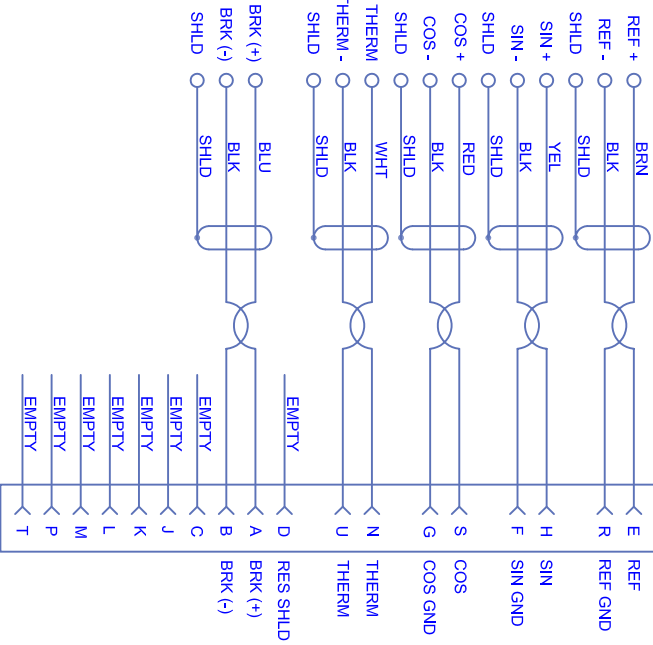

**TOLERANCES UNLESS SPECIFIED**

BORING: = H12  
 SURFACE FINISH: = 63 Ra ✓  
 DECIMAL: .xxx ±.12 (.005)  
 DECIMAL: .xx ±.25 (.010)  
 DECIMAL: .x ±.51 (.020)  
 FRACTION: ±.40 (.016)  
 ANGLE: ±.030

**REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN (0.10°)**

**RESOLVER/BRAKE CABLE**

14-18S/LEADS

CUSTOMER: DRAWING NO. CUSTOMER: DRAWING NO. CUSTOMER: DRAWING NO.

SCALE: 1:1 DATE: 11/11/04 DRAWING NO.: CWMRBxxM-CL

REV. 1