



**NOTES:**


- CONNECTOR - #86-20002 - P108E-14-18S(476) - MOTOR END
- CABLE (BELDEN 8778) - 22 AWG - 6 PR INDIVIDUAL SHIELDS; CABLE DIAMETER = 9.19 (.362)
- AMP END - FLYING LEADS W/ FERRULES
- UNUSED WIRES NEED TO BE CUT BACK AND CONCEALED AT DATUM -A-

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	PRELIMINARY DRAWING	11/16/05	

xx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

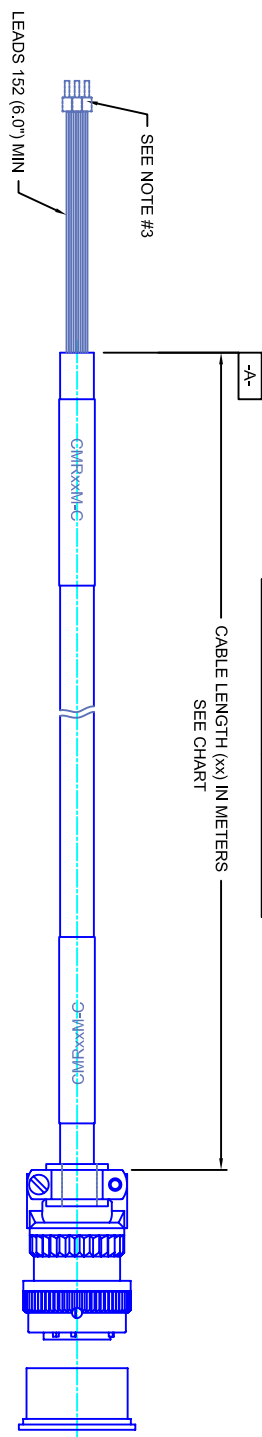

REAR FACE OF SOCKET INSERT

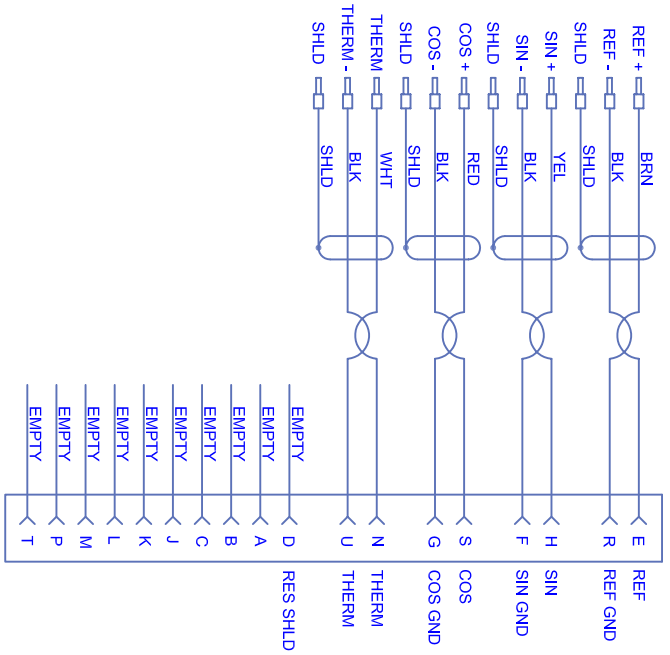

**TOLERANCES UNLESS SPECIFIED**

BORING: ±.03 Ra ✓  
 SURFACE FINISH: H12  
 DECIMAL .xxx ±.12 (.005)  
 DECIMAL .xx ±.25 (.010)  
 DECIMAL .x ±.51 (.020)  
 FRACTION ±.01 (.016)  
 ANGLE (MM/INCHES) ±.030

REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN (0.10°)

PROPRIETARY RIGHTS OF CUSTOMERS ARE INCLUDED IN THE INFORMATION DISCLOSED HEREIN. THIS INFORMATION DOES NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

CUSTOMER: 142/190 - 22 AWG - 14-18S/FERRULES

SCALE: 1:1 DATE: 11/16/05 DRAWING NO.: CMFRxxM-C

CUSTOMER: DRAWN: DFLA SHEET: 1 OF 1

REV. 1



RESOLVER CABLE