
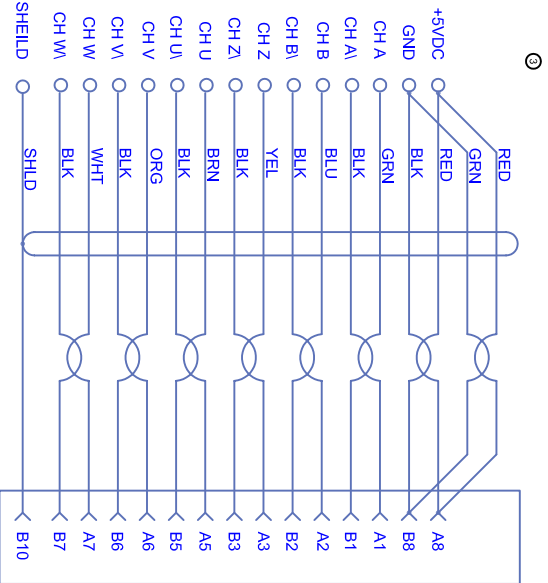



NOTES:

- CONNECTOR - #86-50004 - AMP #1318118-9 - MOTOR END
- CABLE - 24 AWG - 9 PR. SHIELD; CABLE OD = 8.6 (.34) Ⓢ
- AMP END - FLYING LEADS (NO FERRULES)
- UNUSED WIRES NEED TO BE CUT BACK AND CONCEALED AT DATUM -A- Ⓢ

REVISIONS			
REV	DESCRIPTION	DATE	APP'D
1	RELEASE DRAWING	4/21/04	
2	CORRECT AS/A9 - B9/B9	4/28/04	
3	CHG RAW CABLE	6/10/04	

xx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

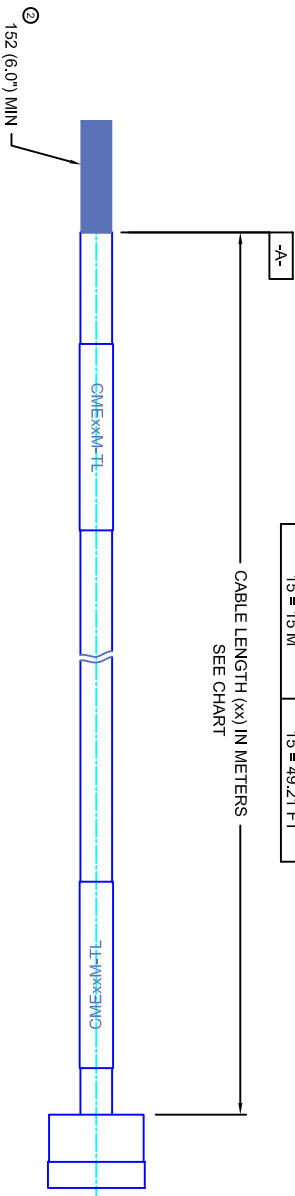

CABLE LENGTH (xx) IN METERS
SEE CHART

TOLERANCES UNLESS SPECIFIED

SURFACE FINISH: = 63 Ra ✓
 BORE: = H12
 DECIMAL .xxx ±.12 (.005)
 DECIMAL .xx ±.25 (.010)
 DECIMAL .x ±.51 (.020)
 FRACTION ±.01 (.016)
 ANGLE (MM INCHES) = 0.50

REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN

PROHIBIT FAY RIGHTS OF CUSTOM MOTORS AND INCLUDE IN THE INFORMATION DISCLOSED HEREIN THIS INFORMATION DOES NOT BE APPLICABLE TO CUSTOMER SPECIFIC MOTOR PARTS. THIS INFORMATION IS FOR GENERAL INFORMATION ONLY.

40/60/80MM MTR - 24 AWG - INDEXER

CUSTOMER: DRAWN: DFLA SHEET: 1 OF 1

SCALE: 1:1 DATE: 4/21/04 DRAWING NO: CMEXXM-TL REV: 3

CUSTOM MOTORS INC