



NOTES:

1. CONNECTOR - SG3106F-20-18S(476)
2. CABLE - 10 AWG (4) CONDUCTORS & 18 AWG (2) & 20 AWG (2) CONDUCTORS; CABLE DIAMETER = 13.84 (.545)
- 3.
- 4.

REVISIONS			
REV	DESCRIPTION	DATE	APPD
1	RELEASE DRAWING	4/22/04	
2	ORG/BRN REPLACED RED/BLK	7/1/04	

xx = CABLE LENGTH (METERS)	REF EQUIVALENT MEASURE (FT)
01 = 1 M	01 = 3.28 FT
03 = 3 M	03 = 9.84 FT
05 = 5 M	05 = 16.40 FT
07 = 7 M	07 = 22.97 FT
09 = 9 M	09 = 29.53 FT
11 = 11 M	11 = 36.09 FT
13 = 13 M	13 = 42.65 FT
15 = 15 M	15 = 49.21 FT

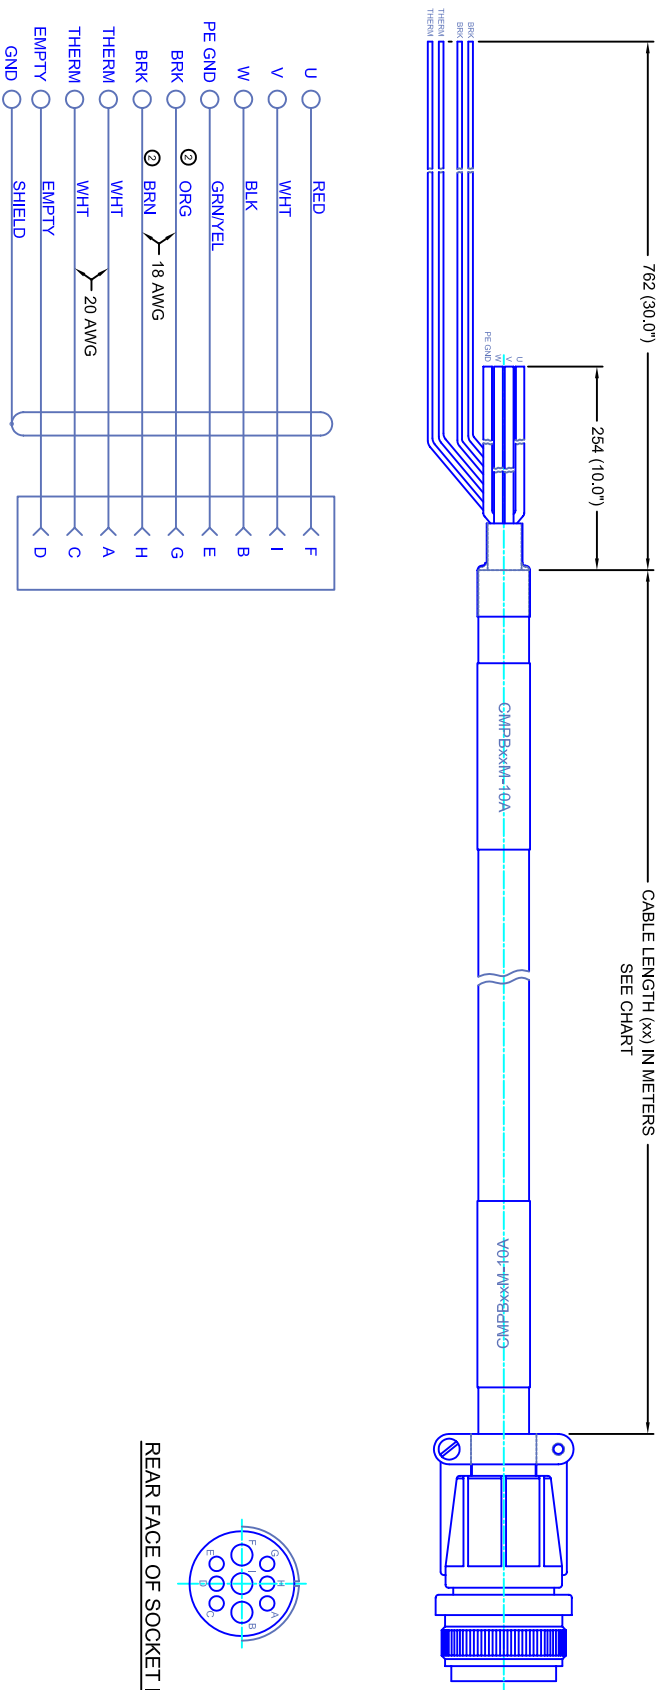

REAR FACE OF SOCKET INSERT

<p>TOLERANCES UNLESS SPECIFIED</p> <p>BORING: = H12 ✓ SURFACE FINISH: = 63 Ra ✓ DECIMAL: .xxx ±.12 (.005) DECIMAL .xx ±.25 (.010) DECIMAL .x ±.51 (.020) FRACTION ±.01 (.016) ANGLE (MM/INCHES) ±.030</p>		<p>REMOVE ALL BURRS/BREAK SHARP EDGES AS SHOWN (0.10°)</p> <p>PROPRIETARY RIGHTS OF CUSTOMERS ARE INCLUDED IN THE INFORMATION DISCLOSED HEREIN. THIS INFORMATION IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.</p>
<p>CUSTOMER: CUSTOMER: DFLA SHEET: 1 OF 1</p>		

CUSTOM MOTORS INC

POWER/BRAKE CABLE

100/130MM - 10AWG - 20-18S

SCALE	DATE	DRAWING NO.	REV.
1:1	4/22/04	GMFBxxMM-10A	2